

A Parameterized Perspective on P_2 -Packings

Jianer Chen^{2,3} Henning Fernau¹ Dan Ning² Daniel Raible¹ Jianxin Wang²

¹ Universität Trier, FB IV—Abteilung Informatik, 54286 Trier, Germany,
`{fernau,raible}@informatik.uni-trier.de`

² School of Information Science and Engineering, Central South University,
 Changsha, Huan 410083, P.R. China,
`alina1028@hotmail.com, jxwang@mail.csu.edu.cn`

³ Department of Computer Science, Texas A&M University, College Station,
 Texas 77843, USA, `chen@cs.tamu.edu`

Abstract. We study (vertex-disjoint) P_2 -packings in graphs under a parameterized perspective. Starting from a maximal P_2 -packing $\mathcal{P}$ of size j we use extremal arguments for determining how many vertices of $\mathcal{P}$ appear in some P_2 -packing of size $(j+1)$. We basically can ‘reuse’ $2.5j$ vertices. We also present a kernelization algorithm that gives a kernel of size bounded by $7k$. With these two results we build an algorithm which constructs a P_2 -packing of size k in time $\mathcal{O}^*(2.482^{3k})$.

1 Introduction and Definitions

Motivation. We consider a generalization of the matching problem in graphs. A matching is a maximum cardinality set of vertex disjoint edges. Our problem is a generalization in the sense that the term edge may be replaced by 2-edge-path called P_2 . More formally, we study the following problem, called P_2 -PACKING:

Given: A graph $G = (V, E)$, and the parameter k .

We ask: Is there a set of k vertex-disjoint P_2 ’s in G ?

P. Hell and D. Kirkpatrick [8, 6] proved $\mathcal{NP}$ -completeness for this problem. P_2 -PACKING attracts attention as it is $\mathcal{NP}$ -hard whereas the matching problem, which is P_1 -PACKING, is poly-time solvable.

Also there is a primal-dual relation to TOTAL EDGE COVER shown by H. Fernau and D. F. Manlove [4]. Recall that an *edge cover* is a set of edges $EC \subseteq E$ that cover all vertices of a given graph $G = (V, E)$. An edge cover is called *total* if every component in $G[EC]$ has at least two edges. By matching techniques, the problem of finding an edge cover of size at most k is poly-time solvable. However, the following Gallai-type identity shows that finding total edge covers of size at most k is $\mathcal{NP}$ -hard: The sum of the number of P_2 ’s in a maximum P_2 -packing and the size of a minimum total edge cover equals $n = |V|$.

There is also a relation to TEST COVER. The input to this problem is a hypergraph $H = (G, E)$ and one wishes to identify a subset $E' \subseteq E$ (the *test cover*) such that, for any distinct $i, j \in V$, there is an $e' \in E'$ with $|e' \cap \{i, j\}| = 1$. TEST COVER models identification problems: Given a set of individuals and a set of binary attributes we search for a minimum subset of attributes that identifies

each individual distinctly. Applications, as mentioned in K. M. J. Bontridder *et al.* [1], range from fault testing and diagnosis, pattern recognition to biological identification. K. M. J. Bontridder *et al.* could show for the case TCP2, where for all $e \in E$ we have $|e| \leq 2$, the subsequent two statements. First, if H has a test cover of size τ , then there is a P_2 -packing of size $n - \tau - 1$ that leaves at least one vertex isolated. Second, if H has a maximal P_2 -packing of size π that leaves at least one vertex isolated, then there is a test cover of size $n - \pi - 1$. This also establishes a close relation between TEST COVER and TOTAL EDGE COVER. So, we can employ our algorithms to solve the TCP2 case of TEST COVER, by using an initial catalytic branch that determines one vertex that should be isolated.

Discussion of Related Work. R. Hassin and S. Rubinstein [5] found a randomized $\frac{35}{67}$ -approximation. K. M. J. Bontridder *et al.* [1] studied P_2 -packing also in the context of approximation, where they considered a series of heuristics H_ℓ . H_ℓ starts from a maximal P_2 -packing $\mathcal{P}$ and attempts to improve it by replacing any ℓ P_2 's by $\ell + 1$ P_2 's not contained yet in $\mathcal{P}$. The corresponding approximation ratios ρ_ℓ are as follows: $\rho_0 = \frac{1}{3}$, $\rho_1 = \frac{1}{2}$, $\rho_2 = \frac{5}{9}$, $\rho_3 = \frac{7}{11}$ and $\rho_\ell = \frac{2}{3}$ for $\ell \geq 4$. As any P_2 -PACKING instance can be transformed to fit in 3-SET PACKING one can use Y. Liu *et al.* [9] algorithm which needs $\mathcal{O}^*(4.61^{3k})$ steps. The first paper to individually study P_2 -PACKING under a parameterized view was E. Prieto and C. Sloper [10]. The authors were able to prove a $15k$ -kernel. Via a clever 'midpoint' search on the kernel they could achieve a run time of $\mathcal{O}^*(3.403^{3k})$.

Our Contributions. The two main algorithmic achievements of this paper are: (1) a new $7k$ -kernel for P_2 -PACKING, (2) an algorithm which solves this problem in $\mathcal{O}^*(2.482^{3k})$. This algorithm makes use of a new theorem that says that we basically can reuse $2.5j$ vertices of a maximal P_2 -packing with size j . This improves a similar result for general 3-SET PACKING [9] where only $2j$ elements are reusable. This theorem is proven by making extensive use of extremal combinatorial arguments. Another novelty is that in this algorithm, the dynamic programming phase (used to inductively augment maximal P_2 -packings) is interleaved with kernelization. This pays off not only heuristically but also asymptotically by a specific form of combinatorial analysis. Thereby we can completely skip the time consuming color-coding which was needed in Liu *et al.* [9] for 3-SET PACKING. We believe that the idea of saving colors by extremal combinatorial arguments could be applied in other situations, as well.

Some Notations and Definitions. We only consider undirected graphs $G = (V, E)$. For a subgraph H of G , denote by $N(H)$ the set of vertices that are not in H but adjacent to at least one vertex on H , i.e., $N(H) = (\bigcup_{v \in H} N(\{v\})) \setminus H$. The subgraph H is *adjacent* to a vertex v if $v \in N(H)$. A P_2 in G is a path which consists of three vertices and two edges. For any path p of this kind we consider the vertices as numbered such that $p = p_1 p_2 p_3$ (where the roles of p_1 and p_3 might be interchanged). For a path p , $V(p)$ ($E(p)$, resp.) denotes the set of vertices (edges, resp.) on p . Likewise, for a set of paths $\mathcal{P}$, $V(\mathcal{P}) := \bigcup_{p \in \mathcal{P}} V(p)$ ($E(\mathcal{P}) := \bigcup_{p \in \mathcal{P}} E(p)$, resp.).

2 Kernelization

We are going to improve on the earlier $15k$ -kernel of E. Prieto and C. Sloper by allowing local improvements on a maximal P_2 -packing, but otherwise using the ideas of E. Prieto and C. Sloper. Therefore, we first revise the necessary notions and lemmas from their paper [10].

2.1 Essential Prerequisites

Definition 1. A double crown decomposition of a graph G is a decomposition (H, C, R) of the vertices in G such that

1. H (the head) separates C and R ;
2. $C = C_0 \cup C' \cup C''$ (the crown) is an independent set such that $|C'| = |H|$, $|C''| = |H|$, and there exist a perfect matching between C' and H , and a perfect matching between C'' and H .

Definition 2. A fat crown decomposition of a graph G is a decomposition (H, C, R) of the vertices in G such that

1. H (the head) separates C and R ;
2. the induced subgraph $G(C)$ is a collection of pairwise disjoint K_2 's;
3. there is a perfect matching M between H and a subset of vertices in C such that each connected component in C has at most one vertex in M .

E. Prieto and C. Sloper could show the following lemmas.

Lemma 1. A graph G with a double crown (H, C, R) has a P_2 -packing of size k if and only if the graph $G - H - C$ has a P_2 -packing of size $k - |H|$.

Lemma 2. A graph G with a fat crown (H, C, R) has a P_2 -packing of size k if and only if the graph $G - H - C$ has a P_2 -packing of size $k - |H|$.

Lemma 3. A graph G with an independent set I , where $|I| \geq 2|N(I)|$, has a double crown decomposition (H, C, R) , where $H \subseteq N(I)$, which can be constructed in linear time.

Lemma 4. A graph G with a collection J of independent K_2 's, where $|J| \geq |N(J)|$, has a fat crown decomposition (H, C, R) , where $H \subseteq N(J)$, which can be constructed in linear time.

2.2 A Smaller Kernel

Let G be a graph, and let $\mathcal{P} = \{L_1, \dots, L_t\}$ be a maximal P_2 -packing in G , where each L_i is a subgraph in G that is isomorphic to P_2 , and $t < k$. Then each connected component of the graph $G - \mathcal{P}$ is either a single vertex or a single edge. Let Q_0 be the set of all vertices such that each vertex in Q_0 makes a connected component of $G - \mathcal{P}$ (each vertex in Q_0 will be called a Q_0 -vertex). Let Q_1 be



Fig. 1. Reducing the number of Q_0 -vertices



Fig. 2. Reducing the number of Q_1 -edges

the set of all edges such that each edge in Q_1 makes a connected component of $G - \mathcal{P}$ (each edge in Q_1 will be called a Q_1 -edge).

Our kernelization algorithm starts with the following process, which tries to reduce the number of Q_0 -vertices and the number of Q_1 -edges, by applying the following rules:¹

Rule 1. If a P_2 -copy L_i in $\mathcal{P}$ has two vertices that each is adjacent to a different Q_0 -vertex, then apply the processes described in Figure 1 to decrease the number of Q_0 -vertices by 2 (and increase the number of Q_1 -edges by 1).

Rule 2. If a P_2 -copy L_i in $\mathcal{P}$ has two vertices that each is adjacent to a different Q_1 -edge, then apply the processes described in Figure 2 to decrease the number of Q_1 -edges by 2 (and increase the size of the maximal P_2 -packing by 1).

Note that these rules cannot be applied forever. The number of consecutive applications of Rule 1 is bounded by $n/2$ since each application of Rule 1 reduces the number of Q_0 -vertices by 2; and the total number of applications of Rule 2 is bounded by k since each application of Rule 2 increases the number of P_2 -copies in the P_2 -packing by 1. We also remark that during the applications of these rules, the resulting P_2 -packing $\mathcal{P}$ may become non-maximal. In this case, we simply first make $\mathcal{P}$ maximal again, using any proper greedy algorithm, before we further apply the rules.

Therefore, we must reach a point, in polynomial time, where none of the rules above is applicable. At this point, the maximal P_2 -packing $\mathcal{P}$ has the following properties:

For each L_i of the P_2 -copies in $\mathcal{P}$,

Property 1. If more than one Q_0 -vertices are adjacent to L_i , then all these Q_0 -vertices must be adjacent to the same (and unique) vertex in L_i .

¹ We have used solid circles and thick lines for vertices and edges, respectively, in the P_2 -packing $\mathcal{P}$, and hollow circles and thin lines for vertices and edges not in $\mathcal{P}$. In particular, two hollow circles linked by a thin line represents a Q_1 -edge.

Property 2. If more than one vertex in L_i are adjacent to Q_0 -vertices, then all these vertices in L_i must be adjacent to the same (and unique) Q_0 -vertex.

Property 3. If more than one Q_1 -edges are adjacent to L_i , then all these Q_1 -edges must be adjacent to the same (and unique) vertex in L_i .

Property 4. If more than one vertex in L_i are adjacent to Q_1 -edges, then all these vertices in L_i must be adjacent to the same (and unique) Q_1 -edge.

Theorem 1. *Let $\mathcal{P} = \{L_1, L_2, \dots, L_t\}$ be a maximal P_2 -packing on which Rules 1-2 are not applicable, where $t \leq k - 1$. If the number of Q_0 -vertices is larger than $2k - 3$, then there is a double crown, constructible in linear time.*

Proof. We partition the Q_0 -vertices into two groups: the group Q'_0 that consists of all the Q_0 -vertices such that each Q_0 -vertex in Q'_0 has at least two different neighbors in a single P_2 -copy L_i of $\mathcal{P}$; and $Q''_0 = Q_0 - Q'_0$. Without loss of generality, let $\mathcal{L}_1 = \{L_1, \dots, L_d\}$ be the collection of P_2 -copies in $\mathcal{P}$ such that each L_i in $\mathcal{L}_1$ has at least two vertices that are adjacent to the same vertex in Q'_0 . By Property 2, at most one vertex in Q'_0 can be adjacent to each P_2 -copy L_i in $\mathcal{L}_1$. Therefore, $|Q'_0| \leq |\mathcal{L}_1| = d$, which also implies that Q''_0 is not empty. Moreover,

$$|Q''_0| = |Q_0| - |Q'_0| \geq 2k - 2 - d \geq 2(k - 1 - d) \geq 2t - 2d.$$

By property 2 again, no vertex in Q''_0 can be adjacent to any P_2 -copy L_i in $\mathcal{L}_1$. Therefore, the neighbors of the vertices in Q''_0 are all contained in the collection $\mathcal{L}_2 = \{L_{d+1}, \dots, L_t\}$. By definition, there is at most one vertex in each L_i in $\mathcal{L}_2$ that is adjacent to Q_0 -vertices. Therefore, the total number $|N(Q''_0)|$ of neighbors of Q''_0 is bounded by $t - d$. Note that Q''_0 is an independent set, and

$$|Q''_0| \geq 2t - 2d = 2(t - d) \geq 2 \cdot |N(Q''_0)|$$

By Lemma 3, the graph has a double crown that can be constructed in linear time. $\square$

The proof of the following theorem is quite similar to that of Theorem 1.

Theorem 2. *Let $\mathcal{P} = \{L_1, L_2, \dots, L_t\}$ be a maximal P_2 -packing on which Rules 1-2 are not applicable, where $t \leq k - 1$. If the number of Q_1 -edges is larger than $k - 1$, then there is a fat crown, which can be constructed in linear time.*

Proof. We partition the Q_1 -edges into two groups: the group Q'_1 that consists of all the Q_1 -edges such that each Q_1 -edge in Q'_1 has at least two different neighbors in a single P_2 -copy L_i of $\mathcal{P}$; and $Q''_1 = Q_1 - Q'_1$. Without loss of generality, let $\mathcal{L}_1 = \{L_1, \dots, L_d\}$ be the collection of P_2 -copies in $\mathcal{P}$ such that each L_i in $\mathcal{L}_1$ has at least two vertices that are adjacent to the same edge in Q'_1 . By Property 4, at most one edge in Q'_1 can be adjacent to each P_2 -copy L_i in $\mathcal{L}_1$. Therefore, $|Q'_1| \leq |\mathcal{L}_1| = d$, which also implies that Q''_1 is not empty. Moreover,

$$|Q''_1| = |Q_1| - |Q'_1| \geq k - 1 - d \geq t - d.$$

By property 4 again, no edge in Q_1'' can be adjacent to any P_2 -copy L_i in $\mathcal{L}_1$. Therefore, the neighbors of the edges in Q_1'' are all contained in the collection $\mathcal{L}_2 = \{L_{d+1}, \dots, L_t\}$. By definition, there is at most one vertex in each L_i in $\mathcal{L}_2$ that is adjacent to Q_1 -edges. Therefore, the total number $|N(Q_1'')|$ of neighbors of Q_1'' is bounded by $t - d$. Note that Q_1'' is a collection of independent K_2 's, and

$$|Q_1''| \geq t - d \geq |N(Q_1'')|$$

By Lemma 4, the graph has a fat crown that can be constructed in linear time. $\square$

Based on all these facts, our kernelization algorithm goes like this: we start with a maximal P_2 -packing $\mathcal{P}$, and repeatedly apply Rules 1-2 (and keeping $\mathcal{P}$ maximal) until neither Rule 1 nor Rule 2 is applicable. At this point, if the number of Q_0 -vertices is larger than $2k - 3$, then by Theorem 1, we generate a double crown that, by Lemma 1, leads to a larger P_2 -packing. On the other hand, if the number of Q_1 -edges is larger than $k - 1$, then by Theorem 2, we generate a fat crown that, by Lemma 2, leads to a larger P_2 -packing. By repeating this process polynomial many times, either we will end up with a P_2 -packing of size at least k , or we end up with a maximal P_2 -packing $\mathcal{P}$ of size less than k on which neither Rule 1 nor Rule 2 is applicable, the number of Q_0 -vertices is bounded by $2k - 3$, and the number of Q_1 -edges is bounded by $k - 1$ (which implies that there are at most $2k - 2$ vertices in Q_1). The vertices in the sets Q_0 and Q_1 , plus the at most $3k - 3$ vertices in the P_2 -packing, give a graph of at most $7k - 8$ vertices.

Theorem 3. *P_2 -PACKING admits a kernel with at most $7k$ vertices.*

We mention here that the (more general results) of H. Fernau and D. Manlove [4] can be improved for the parametric dual (in the sense of the mentioned Gallai-type identity) TOTAL EDGE COVER:

Theorem 4. *TOTAL EDGE COVER admits a kernel with at most $1.5k_d$ vertices.*

Proof. Since we aim at a total edge cover, the largest number of vertices that can be covered by k edges is $1.5k$ (namely, if the edge cover is a P_2 -packing). Hence, if the graph contains more than $1.5k$ vertices, we can reject. This leaves us with a kernel with at most $1.5k$ vertices. $\square$

Corollary 1. *Trivially, P_2 -PACKING does not admit a kernel with less than $3k$ vertices. TOTAL EDGE COVER does not admit a kernel with less than $\alpha_d k_d$ vertices for any $\alpha_d < (7/6)$, unless $\mathcal{P} = \mathcal{NP}$.*

Proof. A P_2 -packing of size k is only possible in a graph with at least $3k$ vertices. Due to Theorem 3 and [2, Theorem 3.1], there does not exist a kernel of size $\alpha_d k_d$ for TOTAL EDGE COVER under the assumption that $\mathcal{P} = \mathcal{NP}$ if $(7-1)(\alpha_d-1) < 1$. $\square$

3 Combinatorial Properties of P_2 -packings

We consider the following setting. Let $\mathcal{P}$ be a maximal P_2 -packing of size j of a given graph $G = (V, E)$. We will argue in this section that, whenever a P_2 -packing of size $(j + 1)$ exists, then there is also one, called $\mathcal{Q}$, that uses at least $2.5j$ out of the $3j$ vertices of $\mathcal{P}$. This combinatorial property of $\mathcal{Q}$ (among others) will be used in the next section by the inductive step of our algorithm for P_2 -PACKING. We employ extremal combinatorial arguments to achieve our results, deriving more and more properties that $\mathcal{Q}$ could possess, without risking to miss any P_2 -packing of size $(j + 1)$.

So, among all P_2 -packings of size $(j + 1)$, we will consider those packings $\mathcal{Q}$ that maximize

$$\sum_{p \in \mathcal{P}} \sum_{q \in \mathcal{Q}} 1_{[E(p)=E(q)]}, \quad (1)$$

where $1_{[\]}$ is the indicator function. We call these $\mathfrak{Q}_{(1)}$. In $\mathfrak{Q}_{(1)}$ we find those packings from $\mathcal{Q}$ who 'reuse' the maximum number of P_2 's in $\mathcal{P}$. From Liu et al. [9] we know:

Lemma 5. $|V(p) \cap V(\mathcal{Q})| \geq 2$ for any $p \in \mathcal{P}$ and $\mathcal{Q} \in \mathfrak{Q}_{(1)}$.

Proof. If there is $p \in \mathcal{P}$ with $|V(p) \cap V(\mathcal{Q})| = 1$, then replace the intersecting path of $\mathcal{Q}$ by p . In the case where $|V(p) \cap V(\mathcal{Q})| = 0$, simply replace an arbitrary $q \in \mathcal{Q} \setminus \mathcal{P}$, that must exist by pigeon-hole, by p . In both cases, we obtain a packing $\mathcal{Q}'$ of the same size as $\mathcal{Q}$, but $|\mathcal{P} \cap \mathcal{Q}'| = |\mathcal{P} \cap \mathcal{Q}| + 1$, contradicting $\mathcal{Q} \in \mathfrak{Q}_{(1)}$. $\square$

A slightly sharper version is the next assertion:

Corollary 2. If $\mathcal{Q} \in \mathfrak{Q}_{(1)}$, then for any $p \in \mathcal{P}$ with $p \notin \mathcal{Q}$, there are $q_1, q_2 \in \mathcal{Q}$ with $|V(p) \cap V(q_i)| \geq 1$ ($i = 1, 2$).

Proof. Suppose it exists $p \in \mathcal{P}$ and only one $q \in \mathcal{Q}$ with $|V(p) \cap V(q)| \geq 2$. Then $\mathcal{Q} \setminus \{q\} \cup \{p\}$ improves on priority (1), contradicting $\mathcal{Q} \in \mathfrak{Q}_{(1)}$. $\square$

Furthermore, from the set $\mathfrak{Q}_{(1)}$ we only collect those P_2 -packings $\mathcal{Q}'$, which maximize the following second property:

$$\sum_{p \in \mathcal{P}} \sum_{q \in \mathcal{Q}'} |E(p) \cap E(q)|. \quad (2)$$

The set of the remaining P_2 -packings will be called $\mathfrak{Q}_{(2)}$. So, in $\mathfrak{Q}_{(2)}$ are those packings who cover the maximum number of edges in $E(\mathcal{P})$. We define $\mathcal{P}_i(\mathcal{Q}) := \{p \in \mathcal{P} \mid i = |p \cap V(\mathcal{Q})|\}$. A vertex $v \in V$ is a $\mathcal{Q}$ -*endpoint* if there is a unique $q = q_1 \dots q_3 \in \mathcal{Q}$ such that $v = q_1$ or $v = q_3$. A vertex v is called $\mathcal{Q}$ -*midpoint* if there is a $q = q_1 q_2 q_3 \in \mathcal{Q}$ with $q_2 = v$.

Definition 3.

1. We call $q = q_1 q_2 q_3 \in \mathcal{Q}$ foldable on $p = p_1 p_2 p_3 \in \mathcal{P}$ if, for $q_2 \in V(p) \cap V(q)$, we have $p_s = q_2$, $s \in \{1, 2, 3\}$, and either $p_{s+1} \notin V(\mathcal{Q})$ or $p_{s-1} \notin V(\mathcal{Q})$, see Figure 3(a).

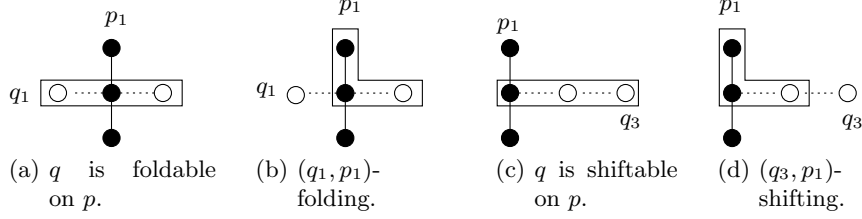


Fig. 3. The black vertices and solid edges indicate the P_2 -packing $\mathcal{P}$. The polygons contain the P_2 's of the packing $\mathcal{Q}$.

2. If q is foldable on p , then substituting q by $q \setminus \{q_i\} \cup \{p_{s\pm 1}\}$ with $i \in \{1, 3\}$, will be called $(q_i, p_{s\pm 1})$ -folding, see Figure 3(b).
3. We call $q = q_1 q_2 q_3 \in \mathcal{Q}$ shiftable with respect to q_1 (q_3 , resp.) on $p = p_1 p_2 p_3 \in \mathcal{P}$ if the following holds: $q_1 \in V(p) \cap V(q)$ ($q_3 \in V(p) \cap V(q)$, resp.) and either $p_{s+1} \notin V(\mathcal{Q})$ or $p_{s-1} \notin V(\mathcal{Q})$ where $p_s = q_1$ ($p_s = q_3$, resp.) and $s \in \{1, 2, 3\}$, see Figure 3(c).
4. If q is shiftable on p with respect to $t \in \{q_1, q_3\}$, then substituting q by $q \setminus \{g\} \cup \{p_{s+1}\}$ (or by $q \setminus \{g\} \cup \{p_{s-1}\}$, resp.), $g \in \{q_1, q_3\} \setminus \{t\}$, will be called (g, p_{s+1}) -shifting ((g, p_{s-1}) -shifting, resp.), see Figure 3(d).

Lemma 6. If $q = q_1 q_2 q_3 \in \mathcal{Q}$ with $\mathcal{Q} \in \mathfrak{Q}_{(2)}$ is shiftable on $p \in \mathcal{P}$ with respect to q_1 (or q_3 , resp.), then there is some $p' \in \mathcal{P}$ with $p' \neq p$ such that $\{q_3, q_2\} \in E(p)$ (or $\{q_2, q_1\} \in E(p)$, resp.).

Proof. We examine the case where $V(p) \cap V(q) = \{q_1\}$ and, w.l.o.g., $p_{s+1} \notin V(\mathcal{Q})$. Now assume the contrary. Then by (q_3, p_{s+1}) -shifting, we obtain a P_2 -packing $\mathcal{Q}'$. Comparing $\mathcal{Q}$ and $\mathcal{Q}'$ with respect to priority 1, $\mathcal{Q}'$ is no worse than $\mathcal{Q}$. But $\mathcal{Q}'$ improves on priority 2, as we gain $\{p_s, p_{s+1}\}$. But this contradicts $\mathcal{Q} \in \mathfrak{Q}_{(2)}$. The case for $V(p) \cap V(q) = \{q_3\}$ follows analogously. $\square$

Lemma 7. If $\mathcal{Q} \in \mathfrak{Q}_{(2)}$, then no $q \in \mathcal{Q}$ is foldable.

Proof. Suppose some $q \in \mathcal{Q}$ is foldable on p and, w.l.o.g., $p_{s+1} \notin V(\mathcal{Q})$ and $q_1 \notin V(\mathcal{P})$. Then by (q_1, p_{s+1}) -folding q we could improve on priority 2, contradicting $\mathcal{Q} \in \mathfrak{Q}_{(2)}$. $\square$

Suppose there is a path p with $|V(p) \cap V(\mathcal{Q})| = 2$. Then p shares exactly one vertex $p_{q'}, p_{q''}$ with paths $q', q'' \in \mathcal{Q}$ due to Corollary 2. In the following $p_{q'}$ and $p_{q''}$ will always refer to the two cut vertices of the paths $q', q'' \in \mathcal{Q}$ which cut a path p with $|V(p) \cap V(\mathcal{Q})| = 2$.

Lemma 8. Let $\mathcal{Q} \in \mathfrak{Q}_{(2)}$. Consider $p \in \mathcal{P}$ with $|V(p) \cap V(\mathcal{Q})| = 2$ and neither $p_{q'}$ nor $p_{q''}$ are $\mathcal{Q}$ -endpoints. Then one of q', q'' is foldable.

Proof. Let $i, j \in \{1, 2, 3\}$ such that $p_{q'} = p_i$ and $p_{q''} = p_j$. Then for $f \in \{1, 2, 3\} \setminus \{i, j\}$, we have $p_f \notin V(\mathcal{Q})$. W.l.o.g., $\{p_i, p_f\} \in E(p)$. Then q' is (q'_1, p_f) -foldable. $\square$

Corollary 3. *Let $\mathcal{Q} \in \Omega_{(2)}$ and $p \in \mathcal{P}$ with $|V(p) \cap V(\mathcal{Q})| = 2$. Then one of $p_{q'}, p_{q''}$ must be a $\mathcal{Q}$ -endpoint.*

Proof. Assume the contrary. Lemmas 7 and 8 lead to a contradiction. $\square$

Theorem 5. *Let $\mathcal{P}$ be a maximal P_2 -packing of size j . If there is a P_2 -packing of size $(j+1)$, then there is also a packing $\mathcal{Q} \in \Omega_2$ such that $|V(\mathcal{P}) \cap V(\mathcal{Q})| \geq 2.5j$.*

Proof. Suppose there is a path $p \in \mathcal{P}$ with $|V(p) \cap V(\mathcal{Q})| = 2$. By Corollary 3, w.l.o.g., $p_{q'}$ is a $\mathcal{Q}$ -endpoint. For $p_{q''}$ there are two possibilities: **a)** $p_{q''}$ is also a $\mathcal{Q}$ -endpoint. Let $\{p_f\} = V(p) \setminus \{p_{q'}, p_{q''}\}$. Then w.l.o.g. $p_{q'}$ is a path neighbor of p_f . Therefore $p_{q'}$ is shiftable. **b)** $p_{q''}$ is a $\mathcal{Q}$ -midpoint.

Claim. $p_{q''} \neq p_2$.

Suppose the contrary. Then w.l.o.g., $p_{q'} = p_1$ and thus q'' is foldable on p by a (q''_1, p_3) -folding. This contradicts Lemma 7. The claim follows.

W.l.o.g., we assume $p_{q''} = p_1$. Then it follows that $p_{q'} = p_2$, as otherwise a (q''_1, p_2) -folding would contradict Lemma 7 again.

From $p_{q'} = p_2$ and $p_3 \notin V(\mathcal{Q})$ we can derive that also in this case $p_{q'}$ is shiftable.

We now examine for both cases the implications of the shiftability of $p_{q'}$. W.l.o.g., we suppose that $p_{q'} = q'_1$. Due to Lemma 6 there is a $p' \in \mathcal{P}$ with $\{q'_3, q'_2\} \in E(p')$. From Corollary 2, it follows that there must be a $\bar{q} \in \mathcal{Q} \setminus \{q'\}$ with $|V(p') \cap V(\bar{q})| = 1$. Hence, $|V(p') \cap V(\mathcal{Q})| = 3$. Note that q' is the only path in $\mathcal{Q}$ with $|V(q') \cap V(p')| = 2$. Summarizing, we can say that for any $p \in \mathcal{P}$ with $|V(p) \cap V(\mathcal{Q})| = 2$ we find a distinct $p' \in \mathcal{P}$ (via q') such that $|V(p') \cap V(\mathcal{Q})| = 3$. So, there is a total injection γ from $\mathcal{P}_2(\mathcal{Q})$ to $\mathcal{P}_3(\mathcal{Q})$. From $|\mathcal{P}_2(\mathcal{Q}) \cup \mathcal{P}_3(\mathcal{Q})| = j$ and the existence of γ we derive $|\mathcal{P}_2(\mathcal{Q})| \leq 0.5j$. This implies $|V(\mathcal{P}) \cap V(\mathcal{Q})| = 2|\mathcal{P}_2(\mathcal{Q})| + 3|\mathcal{P}_3(\mathcal{Q})| \geq 2.5j$. $\square$

4 The Algorithm

We like to point out the following two facts about P_2 -packings. First, if a graph has a P_2 -packing $\mathcal{P} = \{p^1, \dots, p^k\}$, then it suffices to know the set of midpoints $\mathcal{M}_{\mathcal{P}} = \{p_2^1, \dots, p_2^k\}$ to construct a P_2 -packing of size k (which is possibly $\mathcal{P}$) in poly-time. This fact was discovered by E. Prieto and C. Sloper [10] and basically can be achieved by bipartite matching techniques. Second, it also suffices to know the set of endpoint pairs $E_{\mathcal{P}} = \{(p_1^1, p_3^1), \dots, (p_1^k, p_3^k)\}$ to construct a P_2 -packing of size k in poly-time. This is due to Lemma 3.3 of Jia *et al.* [7] as any P_2 -packing instance also can be viewed as a 3-SET PACKING instance.

4.1 Correctness

Algorithm 1. Steps one to six of Algorithm 1 are used for finding fat and double crowns. First we build a maximal P_2 -packing and locally improve it via **Rule 1** and **Rule 2**. If afterwards we have $|Q_0| > 2j - 3$ we construct a double crown where $j := |\mathcal{P}|$. If $|Q_1| > j - 1$ we find a fat crown. These two actions are directly justified by Lemmas 1 and 2. If we do not succeed anymore in finding either one

Algorithm 1 An Algorithm for P_2 -PACKING.

```

1:  $\mathcal{P} = \emptyset$ .
2: Greedily augment  $\mathcal{P}$  to a maximal  $P_2$ -packing.
3: Apply Rule 1 and Rule 2 exhaustively and call the resulting packing  $\mathcal{P}$ .
4: if There is a fat crown or double crown  $(C, H, R)$  with  $C \subseteq V \setminus V(\mathcal{P})$  then
5:    $k \leftarrow k - |H|$ .  $G \leftarrow G - H - C$ .
6:   Goto 1.
7: else if  $k \leq 0$  then
8:   return YES
9: else
10:  Try to construct a  $P_2$ -packing  $\mathcal{P}'$  From  $\mathcal{P}$  with  $|\mathcal{P}| + 1 = |\mathcal{P}'|$  using Algorithm 2.
11:  if Step 10 failed then
12:    return NO.
13:  else
14:     $\mathcal{P} \leftarrow \mathcal{P}'$ .
15:    Goto 2.

```

Algorithm 2 An Algorithm for augmenting a maximal P_2 -packing $\mathcal{P}$.

```

1:  $j \leftarrow |\mathcal{P}|$ .
2: for  $\ell=0$  to  $0.3251j$  do
3:   for all  $S_i \subseteq V(\mathcal{P})$ ,  $S_o \subseteq V \setminus V(\mathcal{P})$  with  $|S_i| = (j+1) - \ell$  and  $|S_o| = \ell$  do
4:     Try to construct a  $P_2$ -packing  $\mathcal{P}'$  with  $S_i \cup S_o$  as midpoints.
5:     if Step 4 succeeded then
6:       return  $\mathcal{P}'$ .
7: for  $\bar{\ell} = 0$  to  $0.1749j + 3$  do
8:   for all  $B_i \subseteq V(\mathcal{P})$ ,  $B_o \subseteq V \setminus V(\mathcal{P})$  with  $|B_i| = 2(j+1) - \bar{\ell}$  and  $|B_o| = \bar{\ell}$  do
9:     for all possible endpoint pairs  $(e_1^1, e_2^1), \dots, (e_1^{j+1}, e_2^{j+1})$  from  $B_i \cup B_o$  do
10:    Try to construct a  $P_2$ -packing  $\mathcal{P}'$  with  $(e_1^1, e_2^1), \dots, (e_1^{j+1}, e_2^{j+1})$  as endpoint pairs.
11:    if Step 10 succeeded then
12:      return  $\mathcal{P}'$ .
13: return failure.

```

of the two crown types we immediately can rely on $|V(G)| \leq 7j$. The next step tries to construct a new P_2 -packing $\mathcal{P}'$ from $\mathcal{P}$ such that $\mathcal{P}'$ comprises one more P_2 than $\mathcal{P}$. For this we invoke Algorithm 2.

Algorithm 2. If a P_2 -packing $\mathcal{P}'$ with $|\mathcal{P}'| = j + 1$ exists we can partition the midpoints $\mathcal{M}_{\mathcal{P}'}$ in a part which lies within $V(\mathcal{P})$ and one which lies outside. We call them $\mathcal{M}_{\mathcal{P}'}^i := \mathcal{M}_{\mathcal{P}'} \cap V(\mathcal{P})$ and $\mathcal{M}_{\mathcal{P}'}^o := \mathcal{M}_{\mathcal{P}'} \cap O$, respectively with $O := V(\mathcal{P}') \setminus V(\mathcal{P})$. Theorem 5 yields $|O| \leq 0.5j + 3$ and thus $|\mathcal{M}_{\mathcal{P}'}^o| \leq 0.5j + 3$. Basically, we can find an integer ℓ with $0 \leq \ell \leq 0.5j + 3$ such that $|\mathcal{M}_{\mathcal{P}'}^i| = (j+1) - \ell$ and $|\mathcal{M}_{\mathcal{P}'}^o| = \ell$.

In step 3 we run through every such ℓ until we reach $0.3251j$. For any choice of ℓ in step 4 we cycle through all possibilities of choosing sets $S_i \subseteq V(\mathcal{P})$ and $S_o \subseteq V \setminus V(\mathcal{P})$ such that $|S_i| = (j+1) - \ell$ and $|S_o| = \ell$. Here S_i and S_o are candidates for $\mathcal{M}_{\mathcal{P}'}^i$ and $\mathcal{M}_{\mathcal{P}'}^o$, respectively. For any choice of S_i and S_o we try

to construct a P_2 -packing. If we succeed once we can return the desired larger P_2 -packing. Otherwise we reach the point where $\ell = 0.3251j$. At this point we change our strategy. Instead of looking for the midpoints of $\mathcal{P}'$ we focus on the endpoints. We do so because this will improve the run time as we will see later. O is the disjoint union of $\mathcal{M}_{\mathcal{P}'}^o$ and the endpoints of $\mathcal{P}'$ which do not lie in $V(\mathcal{P})$ which we call $E_{\mathcal{P}'}^o$. At this point we must have $|\mathcal{M}_{\mathcal{P}'}^o| > 0.3251j$ and therefore $|E_{\mathcal{P}'}^o| < 0.1749j + 3$. Now there must be an integer $\bar{\ell}$ with $0 \leq \bar{\ell} \leq 0.1785j + 3$ such that $|E_{\mathcal{P}'}^o| = \bar{\ell}$ and the number of endpoints within $V(\mathcal{P})$ (called $E_{\mathcal{P}'}^i$) must be $2(j+1) - \bar{\ell}$. In step 7 we iterate through $\bar{\ell}$. In the next step we cycle through all candidate sets for $E_{\mathcal{P}'}^o$ and $E_{\mathcal{P}'}^i$ which are called B_i and B_o in the algorithm. In step 9 we consider all possibilities $(e_1^1, e_2^1), \dots, (e_1^{j+1}, e_2^{j+1})$ of how to pair the vertices in $B_i \cup B_o$. A pair of endpoints (e_r^s, e_{r+1}^s) means that both vertices should appear in the same P_2 of $\mathcal{P}'$. Finally, we try to construct $\mathcal{P}'$ from $(e_1^1, e_2^1), \dots, (e_1^{j+1}, e_2^{j+1})$ by computing a matching according to [7].

4.2 Running Time

Viewed separately, Algorithm 1 runs in poly-time, as fat and double crowns can be constructed in linear time (Lemmas 3 and 4). The only exponential run time contribution comes from Algorithm 2.

Here the run times of all steps except steps 3 and 4 are polynomial in k . For any ℓ we execute step 3 at most $\binom{3j}{(j+1)-\ell} \binom{4j}{\ell} \in \mathcal{O}\left(\binom{3j}{j-\ell} \binom{4j}{\ell}\right)$ times. Likewise step 8 can be upperbounded by $\mathcal{O}\left(\binom{3j}{2j-\ell} \binom{4j}{\ell}\right)$.

Lemma 9. *For any integer z with $0 \leq z \leq 0.5j - 1$ the following holds:*

1. $\binom{3j}{j-z} \binom{4j}{z} < \binom{3j}{j-(z+1)} \binom{4j}{z+1}$.
2. $\binom{3j}{2j-z} \binom{4j}{z} < \binom{3j}{2j-(z+1)} \binom{4j}{z+1}$.

Proof.

1. We have $\binom{3j}{j-(z+1)} \binom{4j}{z+1} - \binom{3j}{j-z} \binom{4j}{z} = \frac{(3j)!(4j)!((j-z)(4j-z)-(2j+z+1)(z+1))}{(j-z)!(2j+z+1)!(z+1)!(4j-z)!}$.

Now it is enough to show $(j-z)(4j-z) - (2j+z+1)(z+1) > 0$ which evaluates to $4j^2 - 7jz - 2j - 2z - 1 > 0$. For the given z this always is true.

2. We have $\binom{3j}{2j-(z+1)} \binom{4j}{z+1} - \binom{3j}{2j-z} \binom{4j}{z} = \frac{(3j)!(4j)!((2j-z)(4j-z)-(j+z+1)(z+1))}{(2j-z)!(j+z+1)!(z+1)!(4j-z)!}$.

Then $((2j-z)(4j-z) - (j+z+1)(z+1)) = 8j^2 - 7jz - j - 2z - 1$ which for the given z is greater than zero. $\square$

With Lemma 9 step 3 is upperbounded by $\mathcal{O}\left(\binom{3j}{(0.6749j)} \binom{4j}{(0.3251j)}\right)$ and step 8 by $\mathcal{O}\left(\binom{3j}{(1.8251j)} \binom{4j}{(0.1749j)}\right)$. Both are dominated by $\mathcal{O}(15.285^j)$. Notice the asymptotic speed-up we achieve by changing the strategy. If we would skip the search for the endpoints, we would have to count ℓ up to $0.5j$ in step 3. Then, $\binom{3j}{(0.5j)} \binom{4j}{(0.5j)} \in \mathcal{O}(17.44^j)$ which is also not a big improvement compared to a brute force search for the midpoints on the $7k$ -kernel, taking $\mathcal{O}^*(17.66^k)$ steps. We conclude:

Theorem 6. P_2 -PACKING can be solved in time $\mathcal{O}^*(2.482^{3k})$.

5 Future work

It would be nice to derive smaller kernels than $7k$ or $1.5k$ for P_2 -PACKING or TOTAL EDGE COVER, resp., in view of the mentioned lower bound results [2].

We try to apply extremal combinatorial methods to save colors for related problems, like P_d -packings for $d \geq 3$. First results seem to be promising. So, a detailed combinatorial (extremal structure) study of (say graph) structure under the perspective of a specific combinatorial problem seems to pay off not only for kernelization (as explained with much detail in [3]), but also for iterative augmentation (and possibly compression).

It would be also interesting to work on exact algorithms for MAXIMUM P_2 -PACKING. By using dynamic programming, this problem can be solved in time $\mathcal{O}^*(2^n)$. By Theorem 4, TOTAL EDGE COVER can be solved in time $\mathcal{O}^*(2^{1.5k}) \subseteq \mathcal{O}^*(2.829^k)$. Improving on exact algorithmics would also improve on the parameterized algorithm for TOTAL EDGE COVER. Likewise, finding for example a search-tree algorithm for TOTAL EDGE COVER would be interesting.

References

1. K. M. J. De Bontridder, B. V. Halldórsson, M. M. Halldórsson, J. K. Lenstra, R. Ravi, and L. Stougie. Approximation algorithms for the test cover problem. *Math. Progr., Ser. B*, 98:477–491, 2003.
2. J. Chen, H. Fernau, Y. A. Kanj, and G. Xia. Parametric duality and kernelization: lower bounds and upper bounds on kernel size. *SIAM Journal on Computing*, 37:1077–1108, 2007.
3. V. Estivill-Castro, M. R. Fellows, M. A. Langston, and F. A. Rosamond. FPT is P-time extremal structure I. In *Algorithms and Complexity in Durham ACiD*, volume 4 of *Texts in Algorithmics*, pages 1–41. King’s College Publications, 2005.
4. H. Fernau and D. F. Manlove. Vertex and edge covers with clustering properties: Complexity and algorithms. In *Algorithms and Complexity in Durham ACiD*, pages 69–84. King’s College, London, 2006.
5. R. Hassin and S. Rubinstein. An approximation algorithm for maximum triangle packing. *Discrete Applied Mathematics*, 154:971–979; 2620 [Erratum], 2006.
6. P. Hell and D. G. Kirkpatrick. Star factors and star packings. Technical Report 82-6, Computing Science, Simon Fraser University, Burnaby, B.C. V5A1S6, Canada, 1982.
7. W. Jia, C. Zhang, and J. Chen. An efficient parameterized algorithm for m -set packing. *Journal of Algorithms*, 50:106–117, 2004.
8. D. G. Kirkpatrick and P. Hell. On the completeness of a generalized matching problem. In *ACM Symposium on Theory of Computing STOC*, pages 240–245, 1978.
9. Y. Liu, S. Lu, J. Chen, and S.-H. Sze. Greedy localization and color-coding: improved matching and packing algorithms. In *International Workshop on Parameterized and Exact Computation IWPEC*, volume 4169 of *LNCS*, pages 84–95. Springer, 2006.
10. E. Prieto and C. Sloper. Looking at the stars. In *International Workshop on Parameterized and Exact Computation IWPEC*, volume 3162 of *LNCS*, pages 138–148. Springer, 2004.

